
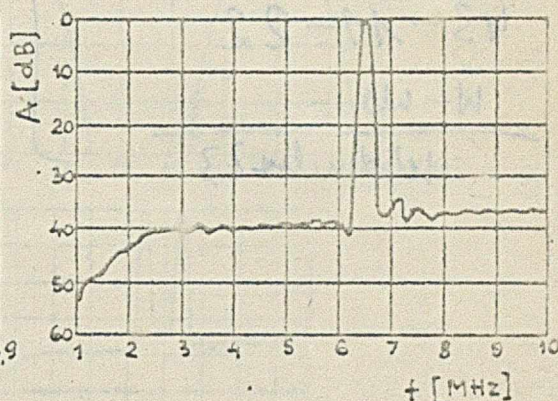
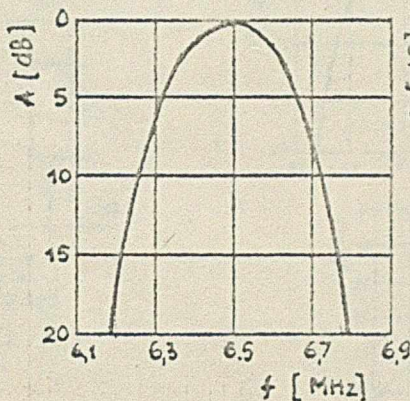


CERAMIC MONOLITHIC FILTER
PCM-6,5-160-30

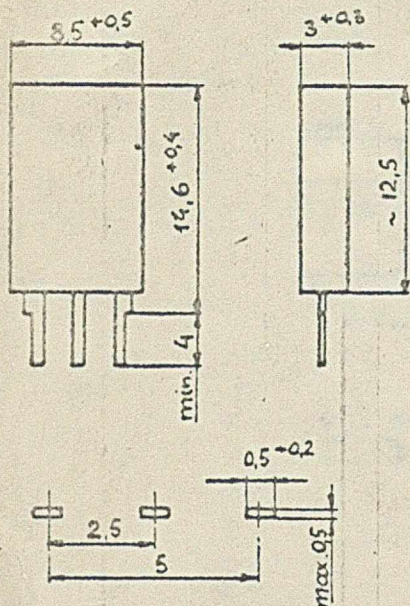

Parameter	Unit	Value
3 dB Band Width x/	kHz	min. ±80
20 dB Band Width	kHz	max. 630
Insertion Loss	dB	max. 8
Spurious Response at 0 ÷ 6 MHz and 7 ÷ 10 MHz	dB	min. 30
In/Output Impedance	Ω	470 ±5%
Ripple	dB	max. 1,5
DC Voltage	V	max. 50
Temperature Stability of Center Frequency -25 - +70°C	%	max. 1
Climatic Category	25/070/10	
Vibration Test	F _{CA} : 3h 5g _n 10 ÷ 55 Hz	
Shock Test	E _b : 10g _n 1000 Shocks	

x/ Counting from nominal of the frequency.

Technical Requirements: WTE-85/L5-04

Application: TV SIP Stage.

Manufacturer

Zakład Doświadczalno-Badawczy
Ceramiki Elektronicznej
02-699 Warszawa - Służewiec
Kłobucka 23 str.

Exporter

UNITRA
Foreign Trade Enterprise
00-950 Warszawa
Nowogrodzka 50